

# HLX671

## HVAC Miniature Air Flow Transmitter

HLX671 is a compact air velocity probe for HVAC applications. The built-in flow sensing element VTQ combines the advantages of state-of-the-art thin-film manufacturing and of the newest transfer molding technology.

It operates on the hot-film anemometer principle and ensures high accuracy and reproducibility as well as long-term stability and outstanding resistance to pollutants.

HLX671 is available with fix installed cable or with plug connection. The measured air velocity up to 20 m/s (4000 ft/min) is available as linear voltage output 0 - 1 V, 0 - 5 V or 0 - 10 V.

The alignment strip on the probe and the matching mounting flange within the scope of supply simplify installation and correct positioning in the air flow. The flange enables the immersion depth to be infinitely variable.

With an optional configuration kit the user can set via a digital setup interface the output configuration and perform an adjustment of the probe.



### Typical Applications

Heating and ventilation systems  
Flow monitoring and control  
Inlet air monitoring in ovens

### Features

High accuracy and long-term stability  
Outstanding resistance to contamination  
Easy and quick mounting  
User configurable

### Technical Data

#### Flow measurement

Measurement range <sup>1)</sup>	0...5 m/s (0...1000 ft/min) 0...10 m/s (0...2000 ft/min) 0...15 m/s (0...3000 ft/min) 0...20 m/s (0...4000 ft/min)
Output signal <sup>1)</sup>	0 - 1 V (max. 1 mA) 0 - 5 V (max. 1 mA) 0 - 10 V <sup>2)</sup> (max. 1 mA)
Accuracy <sup>3)</sup> at 20 °C (68 °F) / 45 % rh and 1013 hPa (14.7 psi)	0.5...5 m/s (100...1000 ft/min): ±(0.2 m/s / 40 ft/min + 3 % of measured value) 1... 10 m/s (200...2000 ft/min): ±(0.3 m/s / 60 ft/min + 4 % of measured value) 1... 15 m/s (200...3000 ft/min): ±(0.35 m/s / 70 ft/min + 5 % of measured value) 1... 20 m/s (200...4000 ft/min): ±(0.4 m/s / 80 ft/min + 6 % of measured value)
Response time $\tau_{90}$	typ. 4 s

#### General

Supply voltage	10...29 V DC SELV
Current demand	max. 50 mA at 20 m/s (4000 ft/min)
Temperature range	operation: -20...60 °C (-4...140 °F) storage: -30...60 °C (-22...140 °F)
Operating range humidity	5...95 % rh (non-condensing)
Connection	
Cable version	0.5 m (1.6 ft) / 2 m (6.6 ft) cable, PVC, temperature-flexible, 5x0.25 mm <sup>2</sup> (AWG 23) with ferrules
Plug version	M12 connector system, 5-pin
Electromagnetic compatibility	EN61326-1 EN61326-2-3
Material / protection class	polycarbonate / IP50 (probe head); IP54 (housing)



<sup>1)</sup> See ordering information

<sup>2)</sup> Only at supply voltage  $V_+ \geq 15$  V

<sup>3)</sup> The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor  $k=2$  (2-fold standard deviation). The tolerance was calculated in accordance with EA-4/02 following the GUM (Guide to the Expression of Uncertainty in Measurement).

# HLX671

## HVAC Miniature Air Flow Transmitter


HLX671 is a compact air velocity probe for HVAC applications. The built-in flow sensing element VTQ combines the advantages of state-of-the-art thin-film manufacturing and of the newest transfer molding technology.

It operates on the hot-film anemometer principle and ensures high accuracy and reproducibility as well as long-term stability and outstanding resistance to pollutants.

HLX671 is available with fix installed cable or with plug connection. The measured air velocity up to 20 m/s (4000 ft/min) is available as linear voltage output 0 - 1 V, 0 - 5 V or 0 - 10 V.

The alignment strip on the probe and the matching mounting flange within the scope of supply simplify installation and correct positioning in the air flow. The flange enables the immersion depth to be infinitely variable.

With an optional configuration kit the user can set via a digital setup interface the output configuration and perform an adjustment of the probe.

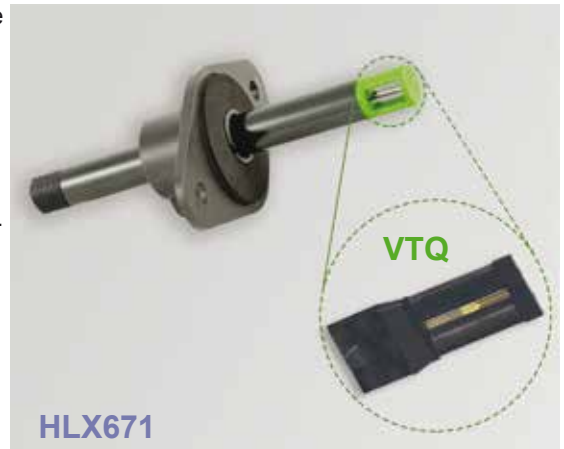

### Typical Applications

Heating and ventilation systems  
Flow monitoring and control  
Inlet air monitoring in ovens

### Features

High accuracy and long-term stability  
Outstanding resistance to contamination  
Easy and quick mounting  
User configurable

### Technical Data

#### Flow measurement

Measurement range <sup>1)</sup>	0...5 m/s (0...1000 ft/min) 0...10 m/s (0...2000 ft/min) 0...15 m/s (0...3000 ft/min) 0...20 m/s (0...4000 ft/min)
Output signal <sup>1)</sup>	0 - 1 V (max. 1 mA) 0 - 5 V (max. 1 mA) 0 - 10 V <sup>2)</sup> (max. 1 mA)
Accuracy <sup>3)</sup> at 20 °C (68 °F) / 45 % rh and 1013 hPa (14.7 psi)	0.5...5 m/s (100...1000 ft/min): ±(0.2 m/s / 40 ft/min + 3 % of measured value) 1... 10 m/s (200...2000 ft/min): ±(0.3 m/s / 60 ft/min + 4 % of measured value) 1... 15 m/s (200...3000 ft/min): ±(0.35 m/s / 70 ft/min + 5 % of measured value) 1... 20 m/s (200...4000 ft/min): ±(0.4 m/s / 80 ft/min + 6 % of measured value)
Response time $\tau_{90}$	typ. 4 s

#### General

Supply voltage	10...29 V DC SELV
Current demand	max. 50 mA at 20 m/s (4000 ft/min)
Temperature range	operation: -20...60 °C (-4...140 °F) storage: -30...60 °C (-22...140 °F)
Operating range humidity	5...95 % rh (non-condensing)
Connection	
Cable version	0.5 m (1.6 ft) / 2 m (6.6 ft) cable, PVC, temperature-flexible, 5x0.25 mm <sup>2</sup> (AWG 23) with ferrules
Plug version	M12 connector system, 5-pin
Electromagnetic compatibility	EN61326-1 EN61326-2-3
Material / protection class	polycarbonate / IP50 (probe head); IP54 (housing)



<sup>1)</sup> See ordering information

<sup>2)</sup> Only at supply voltage  $V_+ \geq 15$  V

<sup>3)</sup> The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor  $k=2$  (2-fold standard deviation). The tolerance was calculated in accordance with EA-4/02 following the GUM (Guide to the Expression of Uncertainty in Measurement).